





● 硬密封浮动球阀
Q41Y-16/25/40C/P/RL

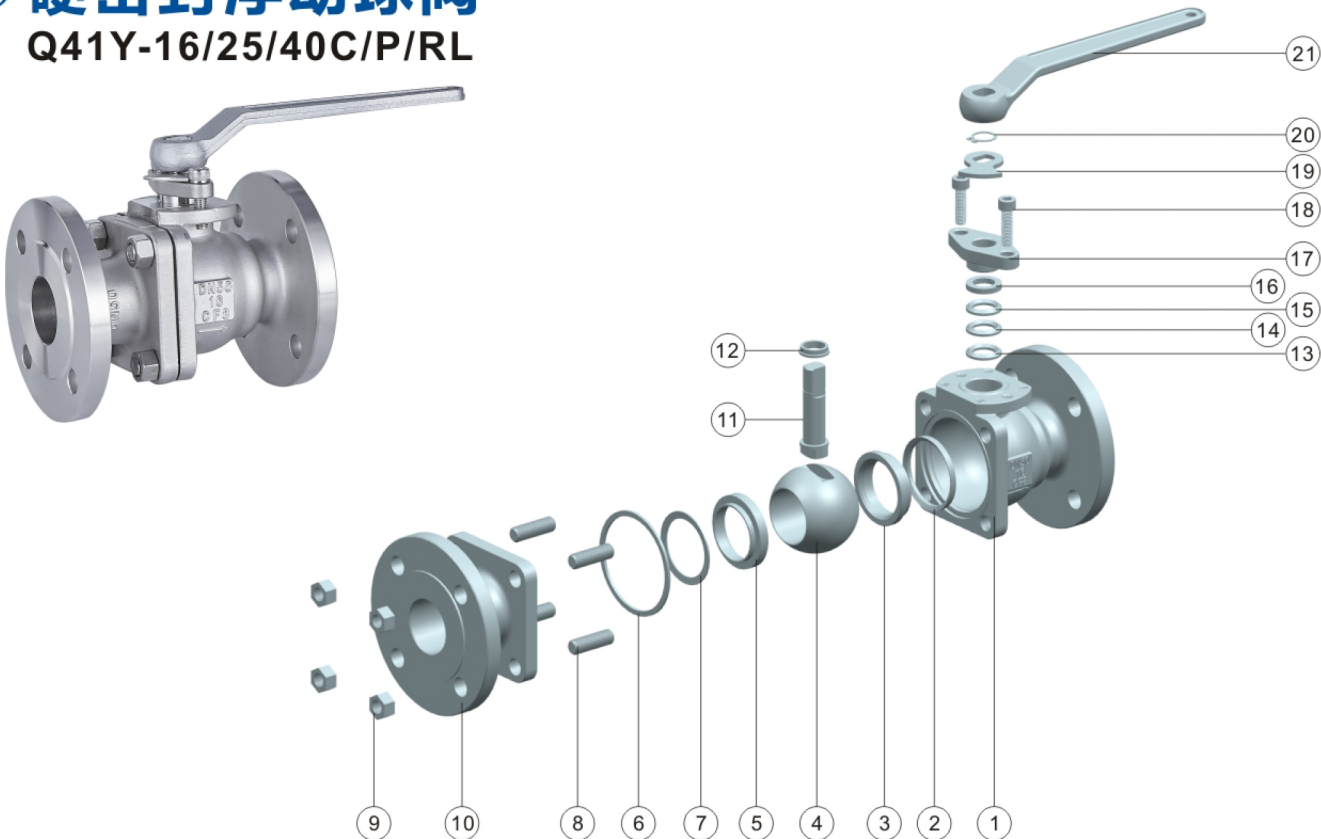

永园阀门	应用规范
● 两片式结构、全通径设计	
● 产品设计按GB/T12237标准	
● 结构长度按JB1686、GB/T12221标准	
● 法兰连接按HG/T20592标准	
● 压力试验按GB/T26480标准	
● 压力温度额定值按GB/T12224和GB/T12237标准	

永园阀门	性能规范		
● 公称压力	PN16	PN25	PN40
● 壳体强度试验（水）	2.4Mpa	3.8Mpa	6.0Mpa
● 密封试验（水）	1.8Mpa	2.8Mpa	4.4Mpa
● 密封试验（气）	0.6Mpa		
● 适用温度	-29℃ ~ 350℃		
● 适用介质	固体颗粒介质、料浆、煤粉、灰渣等		

永园阀门	零件	材料		
● 1	阀体	WCB	CF8	CF3M
● 2	密封圈	柔性石墨+SS304丝	柔性石墨+SS304丝	柔性石墨+SS316丝
● 3	密封阀座	A105+Ni55	S30408+Ni55	S31603+Ni55
● 4	球体	A105+Ni60	S30408+Ni60	S31603+Ni60
● 5	支撑阀座	A105+Ni55	S30408+Ni55	S31603+Ni55
● 6	金属缠绕式垫片	S30408+石墨	S30408+石墨	S31603+石墨
● 7	弹簧	17-7PH	17-7PH	InconelX-750
● 8	双头螺栓	35#	S30408	S31603
● 9	六角螺母	25#	S30408	S31603
● 10	阀盖	WCB	CF8	CF3M
● 11	阀杆	20Cr13	S30408	S31603
● 12	滑动轴承	S30408氮化	S30408氮化	S31603氮化
● 13	填料垫片	S30408	S30408	S31603
● 14	下填料	柔性石墨	柔性石墨	柔性石墨
● 15	中填料	柔性石墨	柔性石墨	柔性石墨
● 16	上填料	柔性石墨	柔性石墨	柔性石墨
● 17	填料压盖	WCB	CF8	CF3M
● 18	内六角螺钉	35#	S30408	S31603
● 19	定位块	Q235-A	SS201	SS201
● 20	弹性挡圈	65Mn	S30408	S30408
● 21	手柄	QT400-18	QT400-18	QT400-18

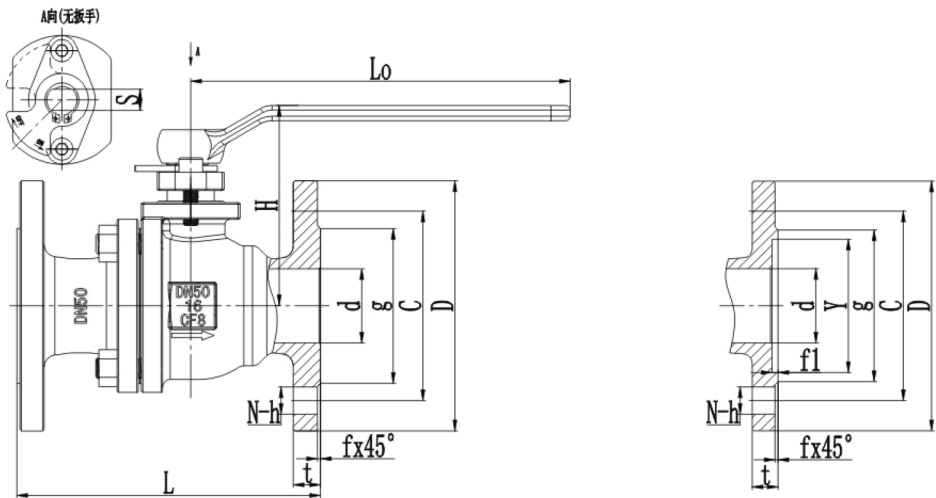

永园阀门	PN16 外形尺寸（mm）												
DN	L	L1	D	C	g	d	N-h	t	f	S	H	L0	
● 15	130	130	95	65	45	15	4-14	16	2	12X8	80	150	
● 20	140	130	105	75	58	20	4-14	18	2	14x9	87	160	
● 25	150	140	115	85	68	24	4-14	18	2	16x10	100	175	
● 32	165	165	140	100	78	32	4-18	18	2	18X12	112	240	
● 40	180	165	150	110	88	38	4-18	18	2	18X12	118	240	
● 50	200	203	165	125	102	49	4-18	18	2	20X14	132	250	
● 65	220	222	185	145	122	62	4-18	18	2	24X16	162	350	
● 80	250	241	200	160	138	75	8-18	20	2	28X18	191	400	
● 100	280	305	220	180	158	98	8-18	20	2	32X21	217	500	
● 125	320	356	250	210	188	125	8-18	22	2	36X24	242	650	
● 150	360	394	285	240	212	150	8-22	22	2	40x27	271	750	

永园阀门	PN25 外形尺寸（mm）												
DN	L	L1	D	C	g	d	N-h	t	f	S	H	L0	
● 15	130	130	95	65	45	15	4-14	16	2	12X8	80	150	
● 20	140	130	105	75	58	20	4-14	18	2	14x9	87	160	
● 25	150	140	115	85	68	24	4-14	18	2	16x10	100	175	
● 32	165	165	140	100	78	32	4-18	18	2	18X12	112	240	
● 40	180	165	150	110	88	38	4-18	18	2	18X12	118	240	
● 50	200	203	165	125	102	49	4-18	20	2	20X14	132	250	
● 65	220	222	185	145	122	62	8-18	22	2	24X16	162	350	
● 80	250	241	200	160	138	75	8-18	24	2	28X18	191	400	
● 100	280	305	235	190	162	98	8-22	24	2	32X21	217	500	
● 125	320	356	270	220	188	125	8-26	26	2	36X24	242	650	
● 150	360	394	300	250	218	150	8-26	28	2	40x27	271	750	

永园阀门	PN40-PF外形尺寸（mm）												
DN	L	L1	D	C	g	d	N-h	t	f	S	H	L0	
● 15	130	130	95	65	45	15	4-14	16	2	12X8	80	150	
● 20	140	150	105	75	58	20	4-14	18	2	14x9	87	160	
● 25	150	160	115	85	68	24	4-14	18	2	16x10	100	175	
● 32	180	180	140	100	78	32	4-18	18	2	18X12	112	240	
● 40	200	200	150	110	88	38	4-18	18	2	18X12	118	240	
● 50	220	230	165	125	102	49	4-18	20	2	20X14	138	250	
● 65	250	290	185	145	122	62	8-18	22	2	24X16	162	350	
● 80	280	310	200	160	138	75	8-18	24	2	28X18	191	400	
● 100	320	350	235	190	162	98	8-22	24	2	32X21	217	500	
● 125	360	400	270	220	188	125	8-26	26	2	36X24	242	650	
● 150	400	403	300	250	218	150	8-26	28	2	40x27	271	750	

注:"L"为JB1686结构长度数据 "L1"为GB/T12221结构长度数据