



● 衬氟放料球阀
FQ41F46-16/6Q/C/P/RL

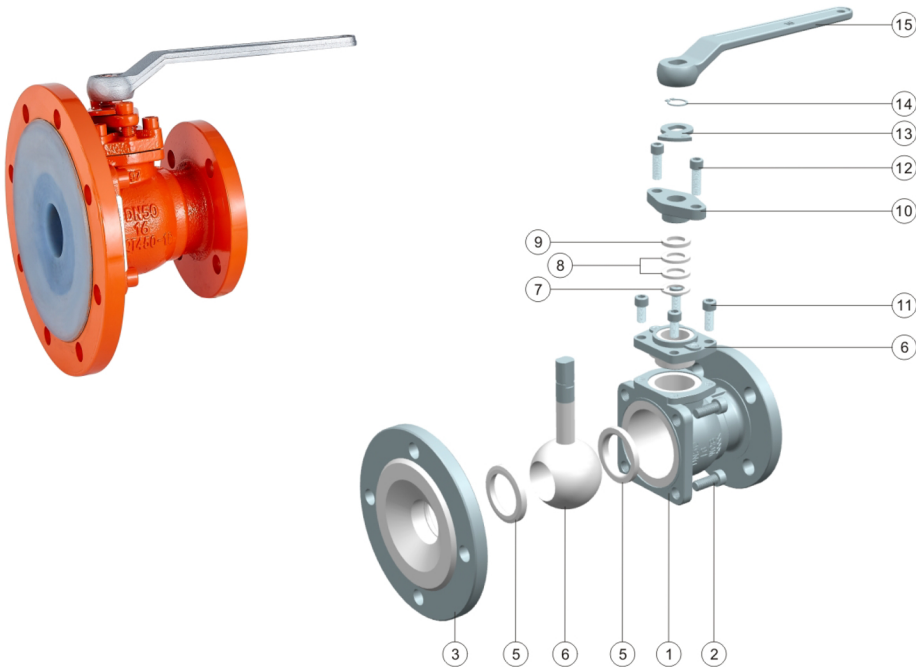

永园阀门	应用规范
● 两片式结构、全通径设计	
● 产品设计按GB/T15185、GB/T12237和HG/T3704标准	
● 结构长度按HG/T3704标准	
● 法兰连接按HG/T20592、GB/T17241.6标准	
● 压力试验按GB/T26480、GB/T13927标准	
● 压力温度额定值按GB/T17241.7和GB/T15185标准	

永园阀门	性能规范
● 公称压力	PN16
● 壳体强度试验（水）	2.4Mpa
● 密封试验（水）	1.8Mpa
● 密封试验（气）	0.6Mpa
● 适用温度	-29℃ ~ 150℃
● 适用介质	水、蒸气、油品/一般腐蚀性介质

永园阀门	零件	材料
● 1	阀体	QT450+FEP
● 2	内六角螺钉	35#
● 3	放料阀盖	QT450+FEP
● 4	阀座	PTFE
● 5	球体	WCB+FEP
● 6	上盖	QT450+FEP
● 7	下填料	PTFE
● 8	中填料	PTFE
● 9	上填料	PTFE
● 10	填料压盖	QT450
● 11	内六角螺钉	35#
● 12	内六角螺钉	35#
● 13	定位块	Q235-A
● 14	弹性挡圈	65Mn
● 15	手柄	QT400-18

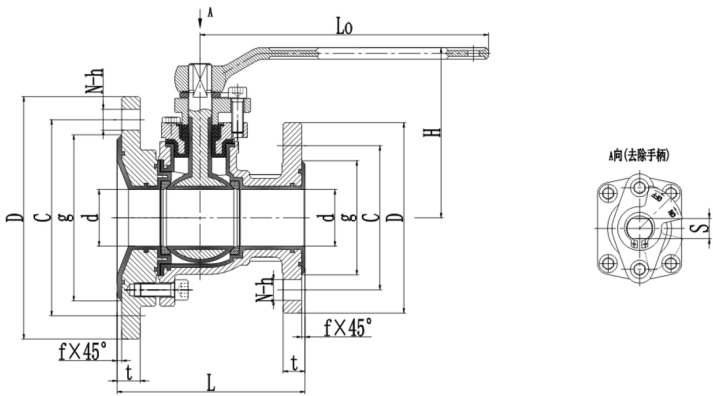

永园阀门						(铁制) 外形尺寸 (mm)					
DN	L	D	C	g	d	N-h	t	f	S	H	L0
25/40	151	115/130	85/100	65/77	24	4-14/4-14	16.5/17	2.5/3	14x9	114	160
25/50	151	115/140	85/110	65/87	24	4-14/4-14	16.5/17	2.5/3	14x9	114	160
25/65	151	115/160	85/130	65/107	24	4-14/4-14	16.5/17.5	2.5/3.5	14x9	114	160
25/80	151	115/190	85/150	65/124	24	4-14/4-18	16.5/19.5	2.5/3.5	14x9	114	160
25/100	151	115/210	85/170	65/144	24	4-14/4-18	16.5/20	2.5/4	14x9	114	160
25/125	151	115/240	85/200	65/174	24	4-14/8-18	16.5/20	2.5/4	14x9	114	160
40/80	146	150/190	110/150	84/124	40	4-18/4-18	19/19.5	3/3.5	20x14	140	250
40/100	146	150/210	110/170	84/144	40	4-18/4-18	19/20	3/4	20x14	140	250
40/125	146	150/240	110/200	84/174	40	4-18/8-18	19/20	3/4	20x14	140	250
50/65	200	165/160	125/130	99/108	49	4-18/4-14	19/17.5	3/3.5	20x14	148	250
50/80	163	165/190	125/150	99/124	49	4-18/4-18	19/19.5	3/3.5	20x14	148	250
50/100	163	165/210	125/170	99/144	49	4-18/4-18	19/20	3/4	20x14	148	250
50/125	163	165/240	125/200	99/174	49	4-18/8-18	19/20	3/4	20x14	148	250
50/150	163	165/265	125/225	99/202	49	4-18/8-18	19/20	3/4	20x14	148	250
65/80	210	185/190	145/150	122/128	65	4-18/4-18	19.5/19.5	3.5/3.5	24X16	167	350
65/100	170	185/210	145/170	122/148	65	4-18/4-18	19.5/20	3.5/4	24X16	167	350
65/125	170	185/240	145/200	122/178	65	4-18/8-18	19.5/20	3.5/4	24X16	167	350
65/150	170	185/265	145/225	122/202	65	4-14/8-18	19.5/20	3.5/4	24X16	167	350
80/100	230	200/210	160/170	138/148	78	8-18/4-18	21.5/20	3.5/4	24X16	184	350
80/125	230	200/240	160/200	138/178	78	8-18/8-18	21.5/20	3.5/4	24X16	184	350
80/150	195	200/265	160/225	138/202	78	8-18/8-18	21.5/20	3.5/4	24X16	184	350
100/125	255	220/240	180/200	158/178	98	8-18/8-18	22/20	4/4	28x18	220	400
100/150	255	220/265	180/225	158/202	98	8-18/8-18	22/20	4/4	28x18	220	400

永园阀门						(钢制) 外形尺寸 (mm)					
DN	L	D	C	g	d	N-h	t	f	S	H	L0
40/80	146	150/190	110/150	84/124	40	4-18/4-18	19/19.5	3/3.5	20x14	140	250
40/100	146	150/210	110/170	84/144	40	4-18/4-18	19/20	3/4	20x14	140	250
40/125	146	150/240	110/200	84/174	40	4-18/8-18	19/20	3/4	20x14	140	250
50/80	163	165/190	125/150	99/124	50	4-18/4-18	19/19.5	3/3.5	20x14	148	250
50/100	163	165/210	125/170	99/144	50	4-18/4-18	19/20	3/4	20x14	148	250
50/125	163	165/240	125/200	99/174	50	4-18/8-18	19/20	3/4	20X14	148	250
50/150	163	165/265	125/225	99/202	50	4-18/8-18	19/20	3/4	20X14	148	250
65/80	210	185/190	145/150	122/128	65	4-18/4-18	19.5/19.5	3.5/3.5	24X16	167	350
65/100	170	185/210	145/170	122/148	65	4-18/4-18	19.5/20	3.5/4	24X16	167	350
65/125	170	185/240	145/200	122/178	65	4-18/8-18	19.5/20	3.5/4	24X16	167	350
65/150	170	185/265	145/225	122/202	65	4-14/8-18	19.5/20	3.5/4	24X16	167	350
80/100	230	200/210	160/170	138/148	78	8-18/4-18	21.5/20	3.5/4	24X16	184	350
80/125	230	200/240	160/200	138/178	78	8-18/8-18	21.5/20	3.5/4	24X16	184	350
80/150	195	200/265	160/225	138/202	78	8-18/8-18	21.5/20	3.5/4	24X16	184	350
100/125	255	220/240	180/200	158/178	98	8-18/8-18	22/20	4/4	28x18	220	400
100/150	255	220/265	180/225	158/202	98	8-18/8-18	22/20	4/4	28x18	220	400