



● 软密封浮动球阀—加长杆
Q41F-16/25C /P/RL

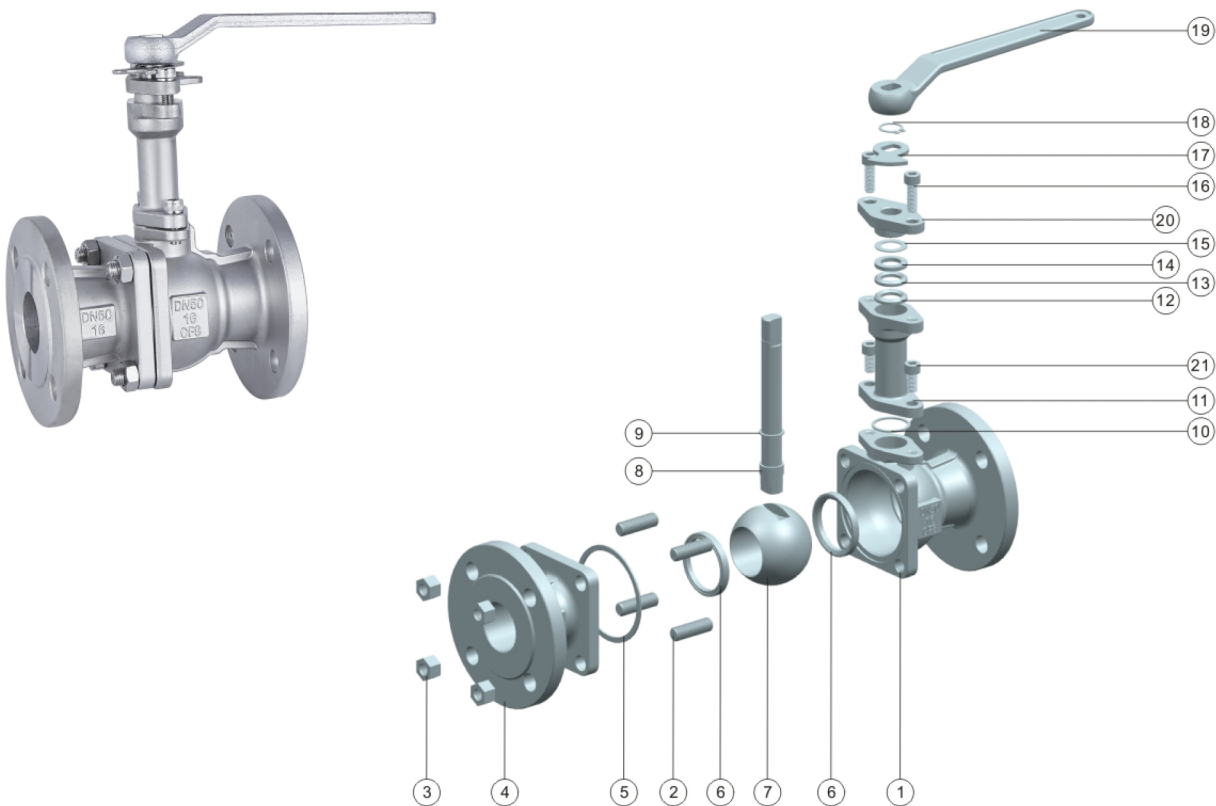

永园阀门	应用规范
●	两片式结构、全通径设计
●	产品设计按GB/T12237标准
●	结构长度按JB1686、GB/T12221标准
●	法兰连接按HG/T20592标准
●	压力试验按GB/T26480标准
●	压力温度额定值按GB/T12224和GB/T12237标准

永园阀门	性能规范	
●	公称压力	PN16 PN25
●	壳体强度试验（水）	2.4Mpa 3.8Mpa
●	密封试验（水）	1.8Mpa 2.8Mpa
●	密封试验（气）	0.6Mpa
●	适用温度	-29℃ ~ 150℃
●	适用介质	水、蒸气、油品/一般腐蚀性介质

永园阀门	零件	材料		
●	1 阀体	WCB	CF8	CF3M
●	2 双头螺柱	35#	S30408	S31603
●	3 螺母	25#	S30408	S31603
●	4 阀盖	WCB	CF8	CF3M
●	5 中垫片	PTFE	PTFE	PTFE
●	6 阀座	PTFE	PTFE	PTFE
●	7 球体	20Cr13/SS201	S30408	S31603
●	8 阀杆	20Cr13	S30408	S31603
●	9 阀杆垫片	PTFE	PTFE	PTFE
●	10 密封垫圈	PTFE	PTFE	PTFE
●	11 加长件	WCB	CF8	CF3M
●	12 下填料	PTFE	PTFE	PTFE
●	13 中填料	PTFE	PTFE	PTFE
●	14 上填料	PTFE	PTFE	PTFE
●	15 垫片	35#	S30408	S30408
●	16 内六角螺钉	35#	S30408	S30408
●	17 定位块	Q235-A	SS201	SS201
●	18 弹性挡圈	65Mn	S30408	S30408
●	19 手柄	QT400-18	QT400-18	QT400-18
●	20 填料压盖	QT400-18/WCB	CF8	CF3M
●	21 内六角螺钉	35#	S30408	S30408

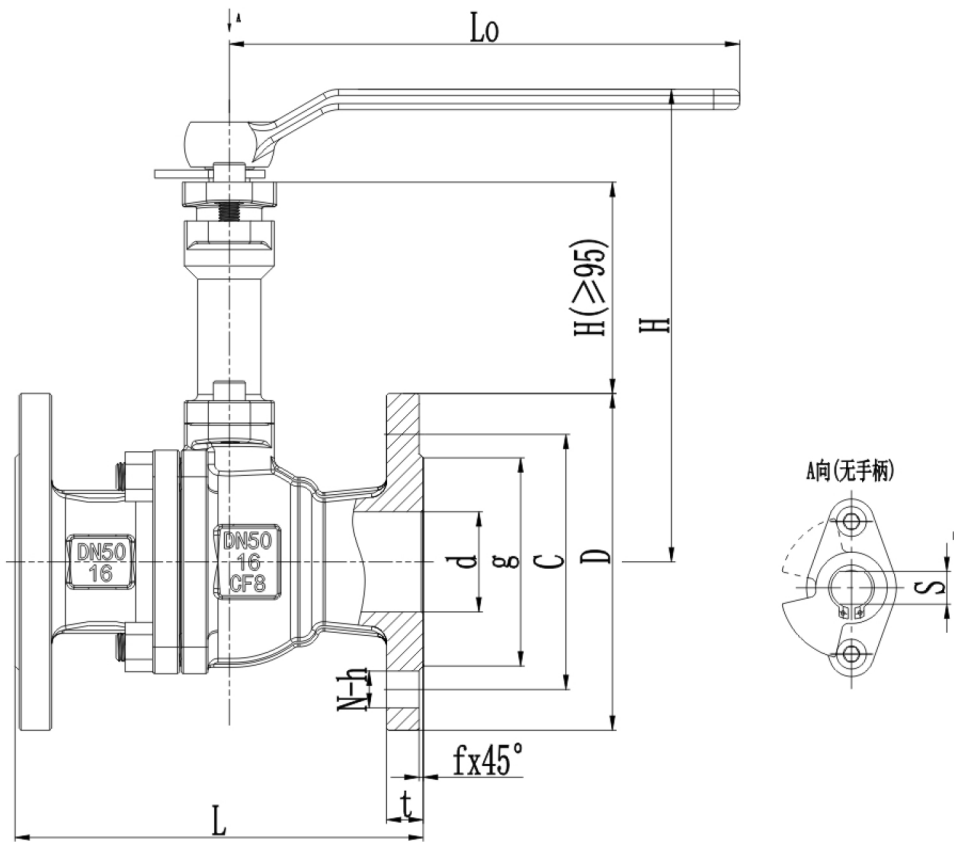

永园阀门	PN16 外形尺寸 (mm)												
	DN	L	L1	D	C	g	d	N-h	t	f	S	H	L0
●	15	130	130	95	65	45	15	4-14	16	2	12x8	179	150
●	20	140	130	105	75	58	20	4-14	18	2	14x9	187	160
●	25	150	140	115	85	68	24	4-14	18	2	16x10	198	175
●	32	165	165	140	100	78	32	4-18	18	2	18x12	212	240
●	40	180	165	150	110	88	38	4-18	18	2	18x12	217	240
●	50	200	203	165	125	102	49	4-18	18	2	20x14	228	250
●	65	220	222	185	145	122	62	8-18	18	2	20x14	238	250
●	80	250	241	200	160	138	75	8-18	20	2	24x16	256	350
●	100	280	305	220	180	158	98	8-18	20	2	28x18	276	400
●	125	320	356	250	210	188	125	8-18	22	2	32x21	323	500
●	150	360	394	285	240	212	150	8-22	22	2	36x24	415	650
●	200	400	457	340	295	268	200	12-22	24	2	40x27	484	750

永园阀门	PN25 外形尺寸 (mm)												
	DN	L	L1	D	C	g	d	N-h	t	f	S	H	L0
●	15	130	130	95	65	45	15	4-14	16	2	12x8	179	150
●	20	140	130	105	75	58	20	4-14	18	2	14x9	187	160
●	25	150	140	115	85	68	24	4-14	18	2	16x10	198	175
●	32	165	165	140	100	78	32	4-18	18	2	18x12	212	240
●	40	180	165	150	110	88	38	4-18	18	2	18x12	217	240
●	50	200	203	165	125	102	49	4-18	20	2	20x14	228	250
●	65	220	222	185	145	122	62	8-18	22	2	20x14	238	250
●	80	250	241	200	160	138	75	8-18	24	2	24x16	256	350
●	100	280	305	235	190	162	98	8-22	24	2	28x18	276	400
●	125	320	356	270	220	188	125	8-26	26	2	32x21	323	500
●	150	360	394	300	250	218	150	8-26	28	2	36x24	415	650
●	200	400	457	360	310	278	200	12-26	30	2	40x27	484	750

注:"L"为JB1686结构长度数据 "L1"为GB/T12221结构长度数据
加高尺寸"H"可按客户要求定制