
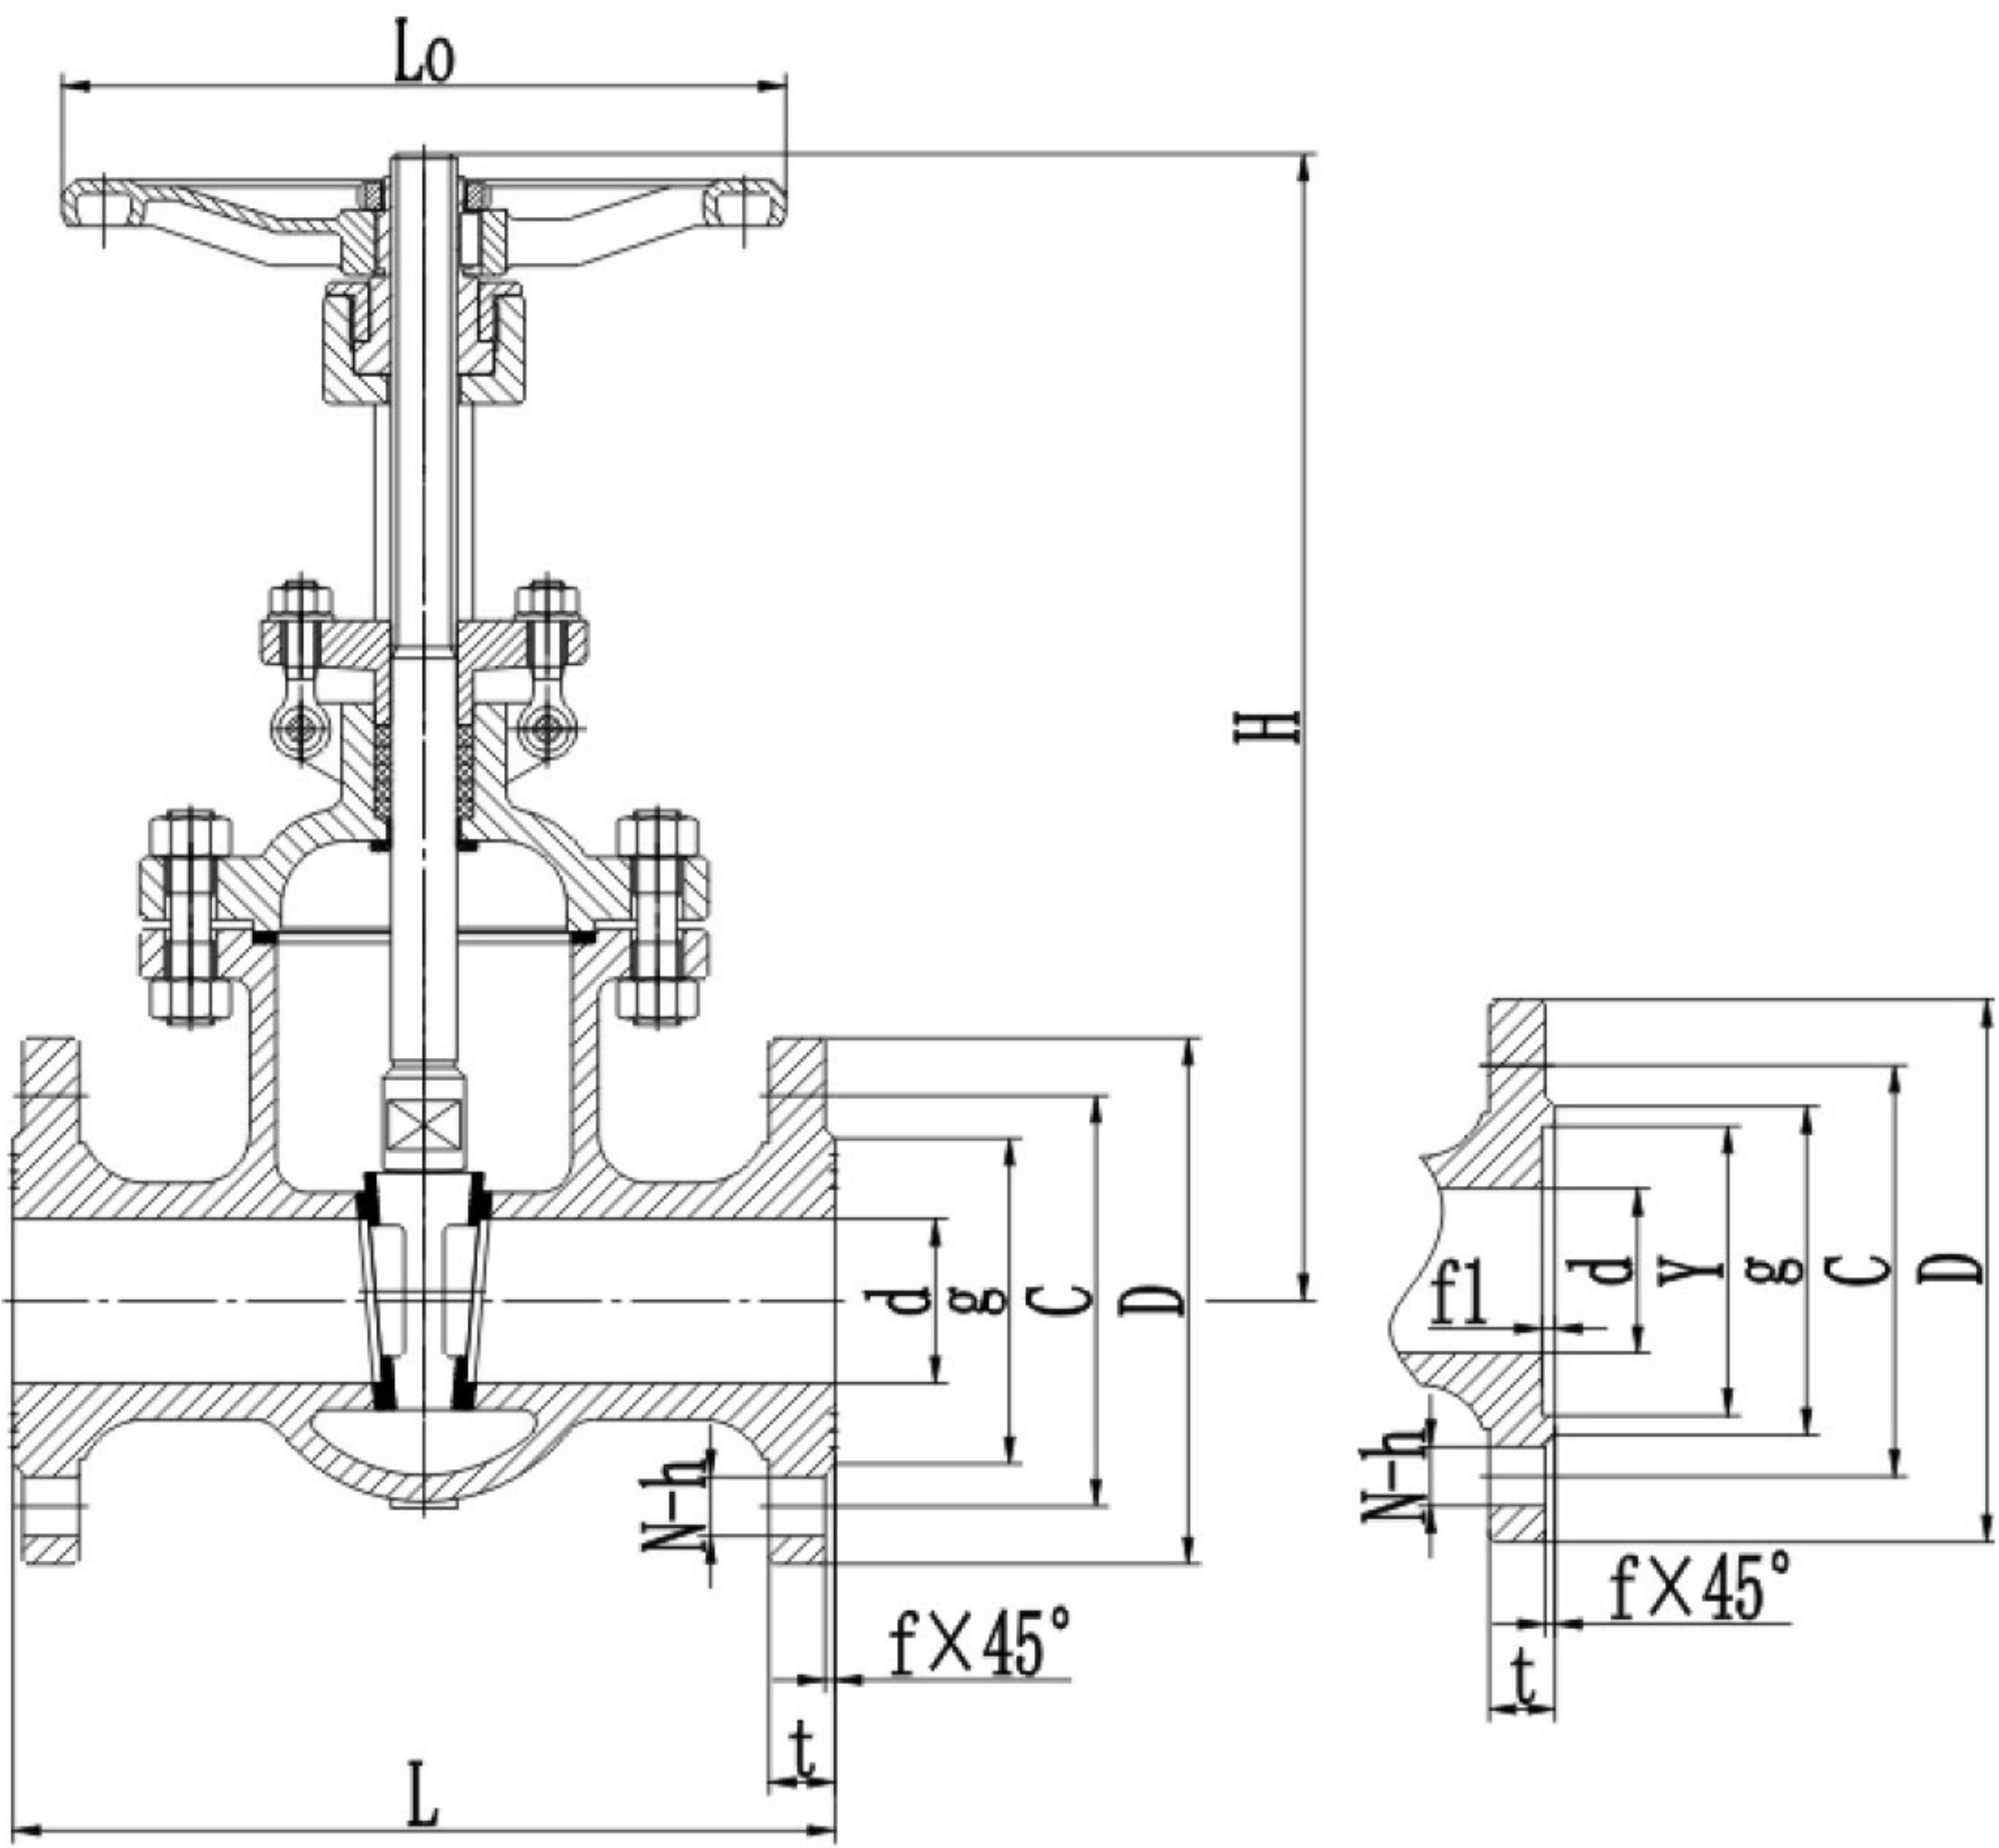


钢制闸阀
Z41H/Y-16/25/40C/P/R/I

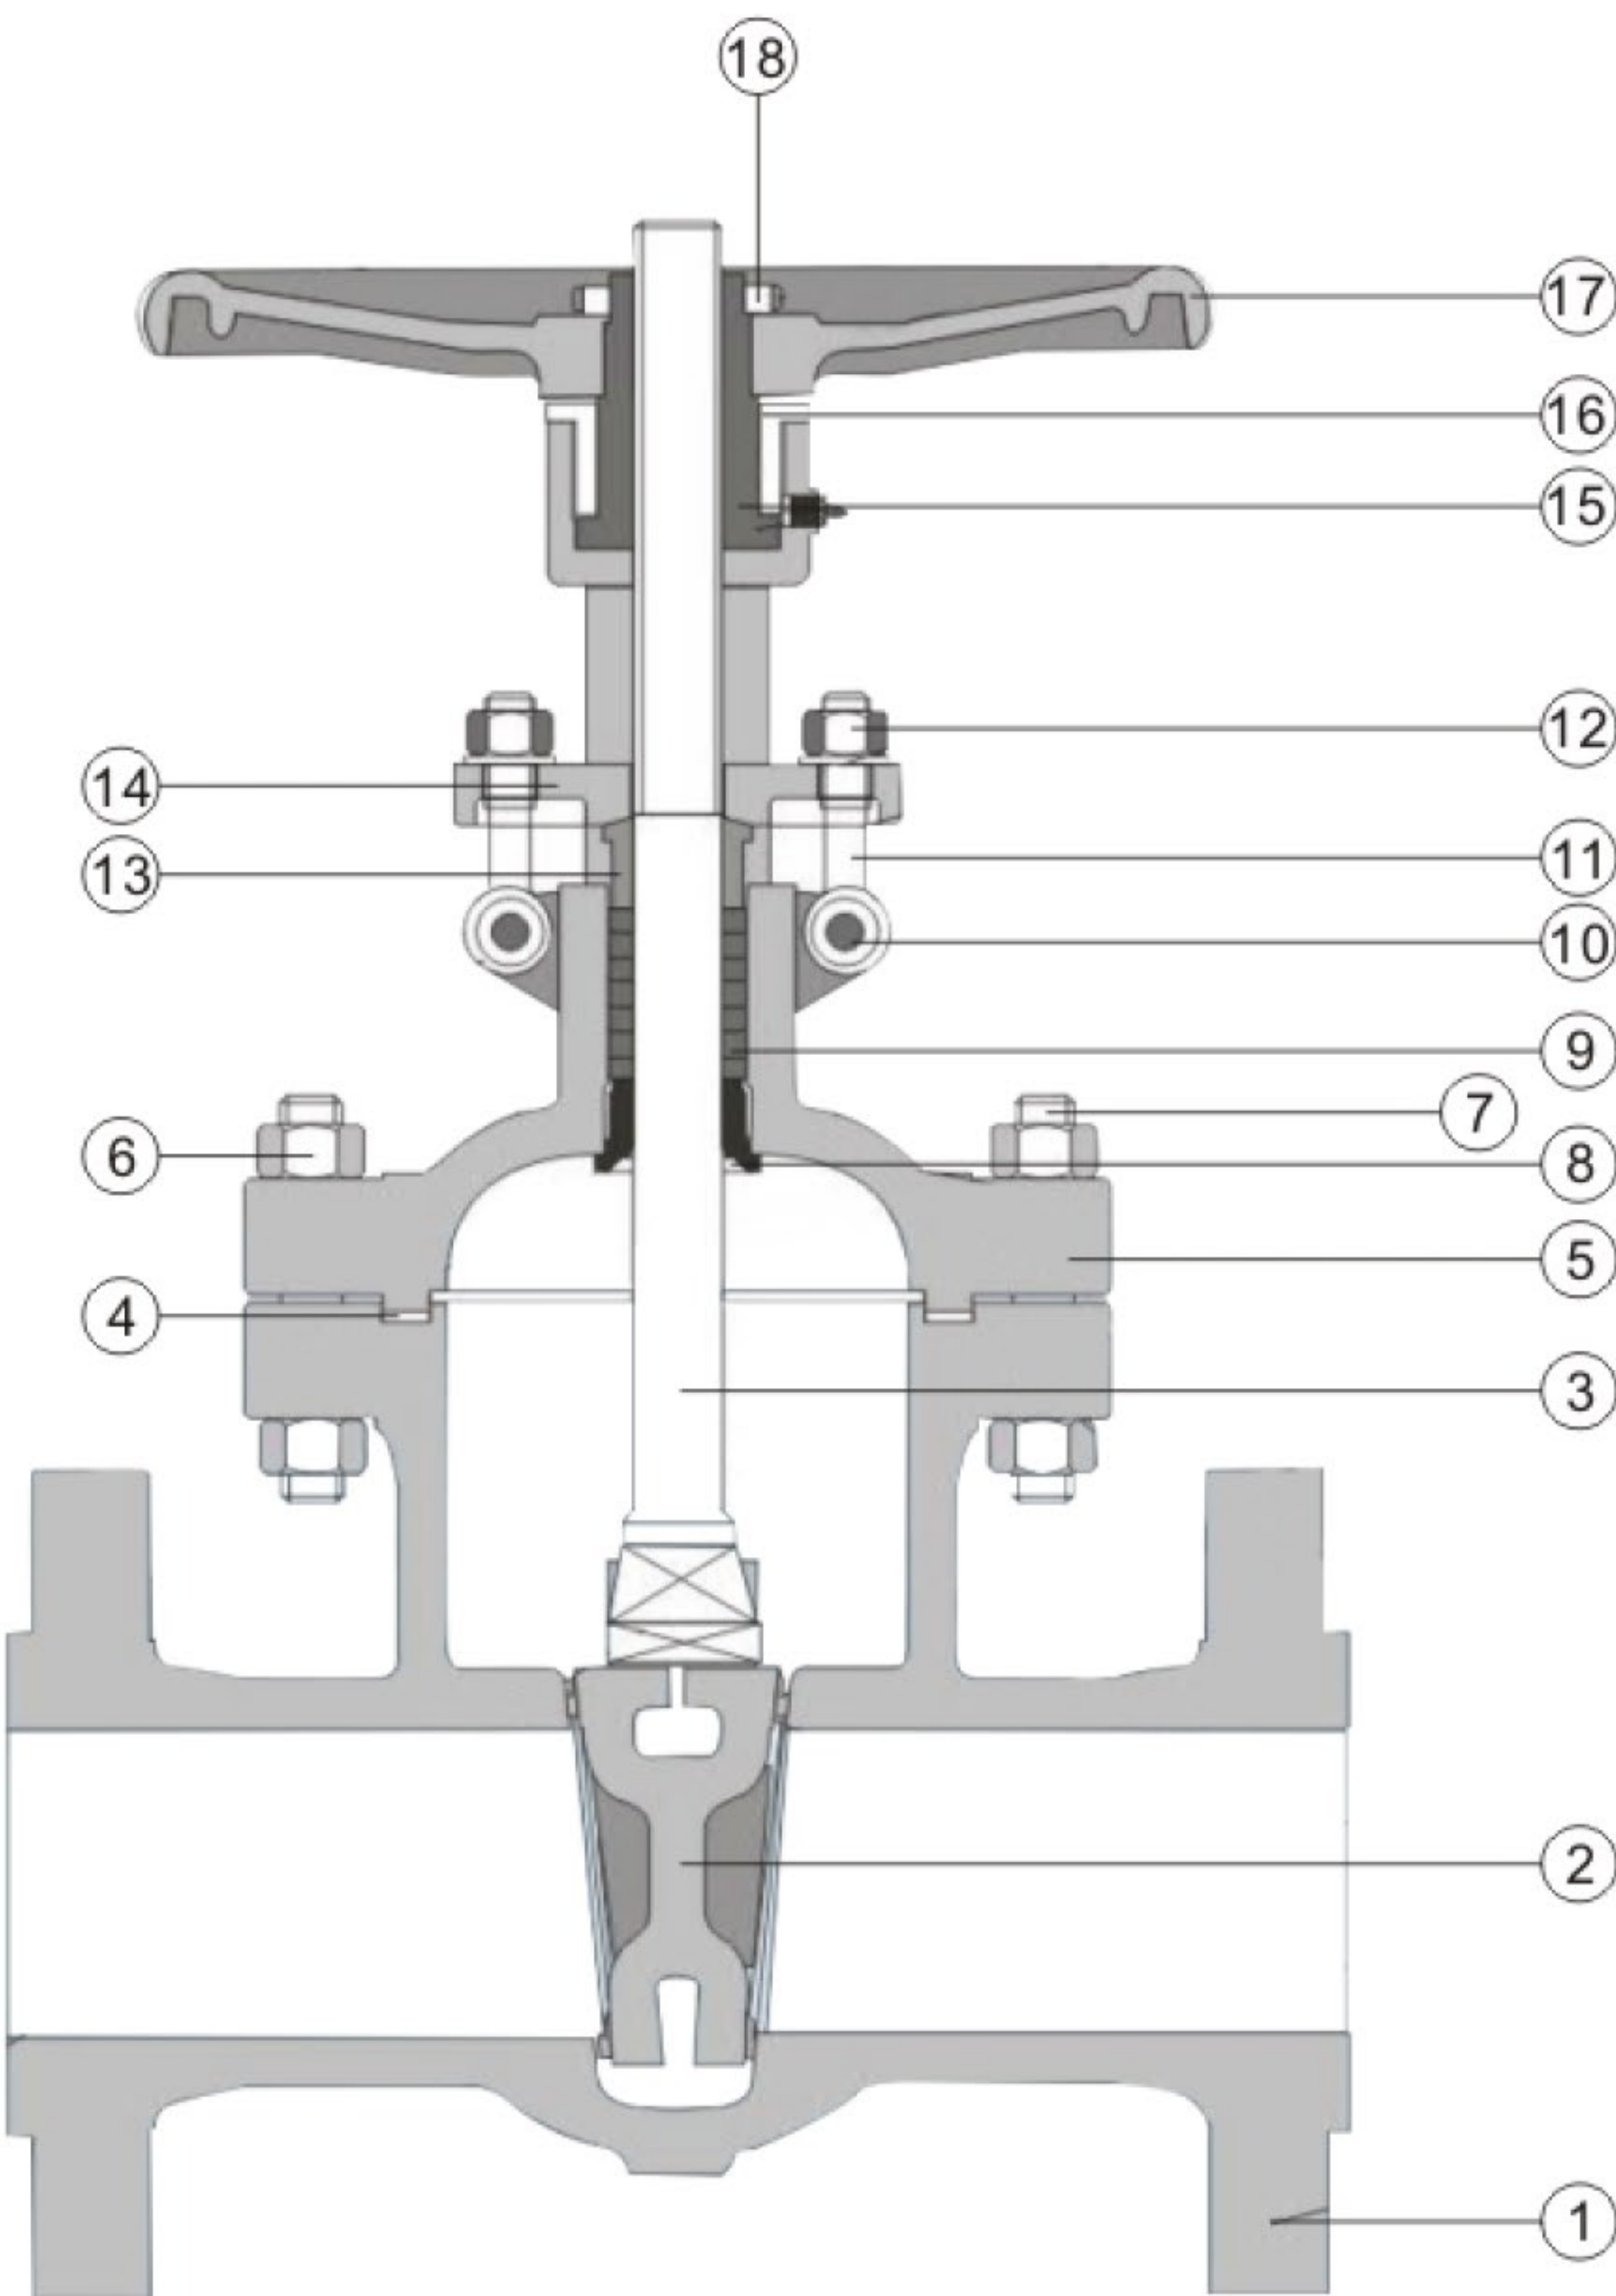

永园阀门		零件	材料			
1	阀体	WCB+13Cr	CF8+STL	CF8M+STL	WC6+STL	
2	闸板	WCB+13Cr	CF8+STL	CF8M+STL	WC6+STL	
3	阀杆	20Cr13	SS304	SS316	25Cr2Mo1VA(F22)	
4	密封垫片	柔性石墨+SS304	柔性石墨+SS304	柔性石墨+SS316	柔性石墨+SS304	
5	阀盖	WCB	CF8	CF8M	WC6	
6	六角螺母	35#	SS304	SS304	35CrMoA	
7	双头螺柱	35CrMoA	SS304	SS304	25Cr2MoV	
8	上密封座	20Cr13	CF8(304)	CF8M(316)	0Cr18Ni9(F304)	
9	填料	柔性石墨	柔性石墨	柔性石墨	柔性石墨	
10	销轴	35#	SS304	SS304	20Cr13	
11	活节螺栓	35CrMoA	SS304	SS304	35#	
12	螺母	35#	SS304	SS304	35CrMoA	
13	填料压套	20Cr13	SS304	SS316	20Cr13	
14	填料压板	WCB	CF8(304)	CF8M(316)	WCB	
15	阀杆螺母	ZCuAl10Fe3	ZCuAl10Fe3	ZCuAl10Fe3	ZCuAl10Fe3	
16	压盖	35#	CF8(304)	CF8M(316)	35#	
17	手轮	QT400-15	QT400-15	QT400-15	QT400-15	
18	手轮螺母	35#	SS304	SS304	35#	

永园阀门	应用规范
1	产品设计按GB/T12234标准
2	结构长度按GB/T12221标准
3	法兰连接按JB79、GB/T20592标准
4	压力试验按GB/T26480标准
5	压力温度额定值按GB/T12224标准

永园阀门		性能规范		
公称压力	PN16	PN25	PN40	
壳体强度试验（水）	2.4Mpa	3.8Mpa	6.0Mpa	
密封试验（水）	1.8Mpa	2.8Mpa	4.4Mpa	
密封试验（气）	0.6Mpa			
适用温度	-29℃ ~ 425℃			
适用介质	水、油品、蒸气/一般腐蚀性介质			

永园阀门		PN16 外形尺寸 (mm)									
DN	L	D	C	g	d	N-h	t	f	H	L0	
15	130	95	65	45	15	4-14	14	2	170	120	
20	150	105	75	55	20	4-14	14	2	190	140	
25	160	115	85	65	25	4-14	14	2	236	160	
32	180	135	100	78	32	4-18	16	2	270	180	
40	200	145	110	85	40	4-18	16	3	268	200	
50	250	160	125	100	50	4-18	16	3	304	220	
65	265	180	145	120	65	4-18	18	3	336	250	
80	280	195	160	135	80	8-18	20	3	358	280	
100	300	215	180	155	100	8-18	20	3	417	300	
125	325	245	210	185	125	8-18	22	3	455	360	
150	350	280	240	210	150	8-23	24	3	507	400	
200	400	335	295	265	200	12-23	26	3	818	400	
250	450	405	355	320	250	12-25	30	3	969	450	
300	500	460	410	375	300	12-25	30	4	1145	560	
350	550	520	470	435	350	16-25	34	4	1280	640	

永园阀门		PN25 外形尺寸 (mm)									
DN	L	D	C	g	d	N-h	t	f	H	L0	
15	130	95	65	45	15	4-14	16	2	170	120	
20	150	105	75	55	20	4-14	16	2	190	140	
25	160	115	85	65	25	4-14	16	2	205	160	
32	180	135	100	78	32	4-18	18	2	270	180	
40	200	145	110	85	40	4-18	18	3	310	200	
50	250	160	125	100	50	4-18	20	3	358	240	
65	265	180	145	120	65	8-18	22	3	373	240	
80	280	195	160	135	80	8-18	22	3	435	280	
100	300	230	190	160	100	8-23	24	3	500	300	
125	325	270	220	188	125	8-25	28	3	614	320	
150	350	300	250	218	150	8-25	30	3	734	360	
200	400	360	310	278	200	12-25	34	3	818	400	
250	450	425	370	332	250	12-30	36	3	969	450	
300	500	485	430	390	300	16-30	40	4	1145	560	
350	550	550	490	448	350	16-34	44	4	1280	640	

永园阀门		PN40 外形尺寸 (mm)										
DN	L	D	C	g	d	N-h	t	f	Y	f1	H	L0
15	130	95	65	45	15	4-14	16	2	40	4	170	120
20	150	105	75	55	20	4-14	16	2	51	4	190	140
25	160	115	85	65	25	4-14	16	2	58	4	205	160
32	180	135	100	78	32	4-18	18	2	66	4	270	180
40	200	145	110	85	40	4-18	18	3	76	4	310	200
50	250	160	125	100	50	4-18	20	3	88	4	358	240
65	290	180	145	120	65	8-18	22	3	110	4	373	240
80	310	195	160	135	80	8-18	22	3	121	4	435	280
100	350	230	190	160	100	8-23	24	3	150	4.5	500	300
125	400	270	220	188	125	8-25	28	3	176	4.5	614	320
150	450	300	250	218	150	8-25	30	3	204	4.5	734	360
200	550	375	320	282	200	12-30	38	3	260	4.5	818	400
250	650	445	385	345	250	12-34	42	3	313	4.5	969	450
300	750	510	450	408	300	16-34	46	4	364	4.5	1145	560
350	850	570	510	465	350	16-34	52	4	422	5	1280	640